

foamalux

FOAMALUX (FE) Black

Black Economy Foam PVC is an extruded, closed cell, unplasticised PVC foam sheet containing 45-50% recycled material. The fine, uniform, closed cell structure underlies a firm, satin surface.

Product Range

Colour	Black
Thickness (mm)	3 -10 &19
Standard Sheet Size	1220 x 2440 1560 x 3050 2050 x 3050


*Non-standard sizes are available subject to minimum order quantities.

Application

Typical end uses of Foamalux (fe):

Signage	Shop Outfitting
Display Digital	Printing
Wall Cladding	Insulation Panel
Partitioning	False Ceiling
Fabrication	Models
Furniture	Shelving

Black

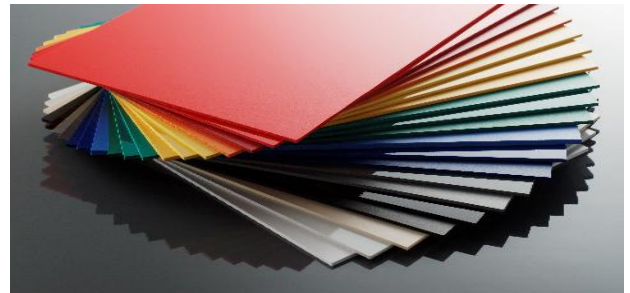

Economy Foam PVC can be installed in a diversity of applications, with varying temperatures. The material's mechanical performance is known to remain stable in prolonged service in temperatures ranging from -20 to +60 °C.

Installation

Applications of **Black Economy Foam PVC** must make adequate allowance for thermal movement. Adequate clearance must be allowed if holes are drilled for fixing and in rebates of support frames.

Print Preparation

For a sheet clean and protected by film, only ionization or static brush is required. Lukewarm water and ordinary non-abrasive household detergent and a sponge or soft cloth is normally sufficient for degreasing and cleaning prior to secondary operations the following solvents are suitable: methyl alcohol or methylated spirits.

Static

Rinsing the surface with water or antistatic cleaning agent can reduce static charge. Another method is to blow down the sheet with ionised air. The effect of this treatment is short term but usually sufficient for subsequent operations

Service Temperature



Brett Martin Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Brett Martin Ltd., 24 Roughfort Road, Mallusk, Co. Antrim, N. Ireland, BT36 4RB.
Tel: +44 (0)28 9084 9999 Fax: +44 (0)28 9083 6666 E-mail: technical@brettmartin.com

REF CODE FE_000_B
10.02.2017